

RIVELGAS COMBI




Преносим инструмент за откриване на газ течове и персонална безопасност

RIVELGAS COMBI

Код	100093	100094	100095	100096	100098
СЕНЗОРИ	COMBI 01	COMBI 02	COMBI 03	COMBI 04	COMBI 06
0-100% LEL *CH ₄	X	X		X	X
0-100% VOL *CH ₄	X	X		X	X
0-10.000 PPM *CH ₄		X	X		X
0-30% O ₂				X	X
PRICE €	900,00	1.000,00	820,00	1.000,00	1.195,00

*При поискване с допълнително заплащане, калибриране за CH₄ и/или C₃H₈ За други комбинации, моля свържете се с Офис продажби.

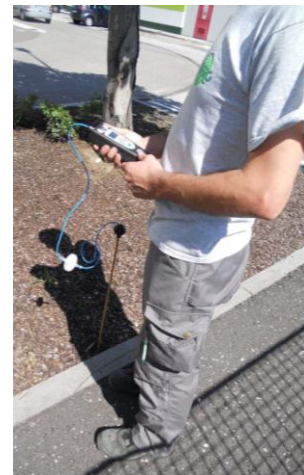

КОМПЛЕКТАЦИЯ АКСЕСОАРИ			
107012	102002	102010	107020
			
Транспортен куфар за пренасяне на устройството и неговото зарядно за батерии	Зарядно устройство за батерия за Rivelgas Combi	Зарядно устройство за кола за Rivelgas Combi - бесплатно ако го закупите със зарядно устройство art. No. 102002	Калъф за инструмента. Позволява пренасянето му и лесна визуализация по време на работа
60,00 €	160,00€	9,00 €	37,00 €

ATTENTION! PLEASE LOOK AT THE OFFER "PROBES", BECAUSE THE INSTRUMENT NEEDS AT LEAST ONE PROBE.

DOCUMENTATION SYSTEMS

CONTROL SYSTEMS

On request we provide detailed information about DOCUMENTATION and CONTROL systems:

Wireless communication with Bluetooth device



Palm PDA and/or PC for digital documentation



Available software:

- for saving leaks and GPS data on the PC, having a real time graph and for a useful data processing after work



- to plan the work before the detection

- many other solutions



In order to use the software, you must be in possession of a power supply for communication PC and a license



HANDYGAS TWO

FOR A QUICK VERIFICATION OF THE CALIBRATION AND FLOW

Portable instrument for the verifications of the calibration and flow, utilizable with two cylinders. The consumption of gas is handled manually.



QUICKTEST

FOR A QUICK VERIFICATION OF THE SENSIBILITY

Portable instrument for the verification of the calibration. It is a gauge compatible with many types of disposable cylinders. The gauge guarantee automatically the escape of a minimum necessary gas for the verification of the sensibility. Only for instrument with suction.



TARMATIC

PROFESSIONAL CALIBRATION SYSTEM

Professional instrument for the automatic supply of gases, for the verification of calibration and digital control of the flow. In combination with the right software you can perform an automatic calibration of the instrument (without operator).

The photos shown in this offer are indicative.



Certificato UNI-EN-ISO 9001

TECHNICAL INFORMATION

		Range	Resolution	Low sensitivity
0-100% LEL	CH ₄	1-100 % LEL	1%	0,1%
0-100% VOL	CH ₄	1-100% VOL	1%	0,1%
0-10.000 PPM	CH ₄	1-1000 PPM/1000-1%	5 PPM / 100 PPM	1 PPM
0-30%	O ₂	0-30%	0,1%	1%

SUCTION SYSTEM

Suction system	Membrane pump
Capacity of suction	0.6 l/min.

CALIBRATION

Periodical calibration	Every 12 month (as ISO Standard) at HUBERG or service center authorized by HUBERG
Calibration with	With certified bottle

POWER SUPPLY

Power Supply	Rechargeable NiMh batteries
Recharging of batteries	With Huberg battery charger (to be carried out in a safe area)
Autonomy	More than 12 hours under normal working conditions

CERTIFICATION

  II 2G Ex ib d IIC T4 Gb EN 60079-29-1

GENERAL TECHNICAL DATA

Environmental working condition	<input type="checkbox"/> temperature	-25 ÷ 50°C
	<input type="checkbox"/> humidity	< 95%
Environmental storage condition	<input type="checkbox"/> temperature	-40 ÷ 60°C
	<input type="checkbox"/> humidity	< 95%
Size (L x W x H)	290 x 70 x 33 mm	
Weight	From 450 g	